


110 GPM LOW PROFILE SAFETY SUCTION

PRODUCT FEATURES

- 110GPM Rating with Vacuum Break
- 52GPM without Vacuum Break
- Silicone Injection Ports
- IAPMO Certified
- UL Recognized
- CSA Certified

 2-5/8" Hole Size
1.5" Slip or 50mm

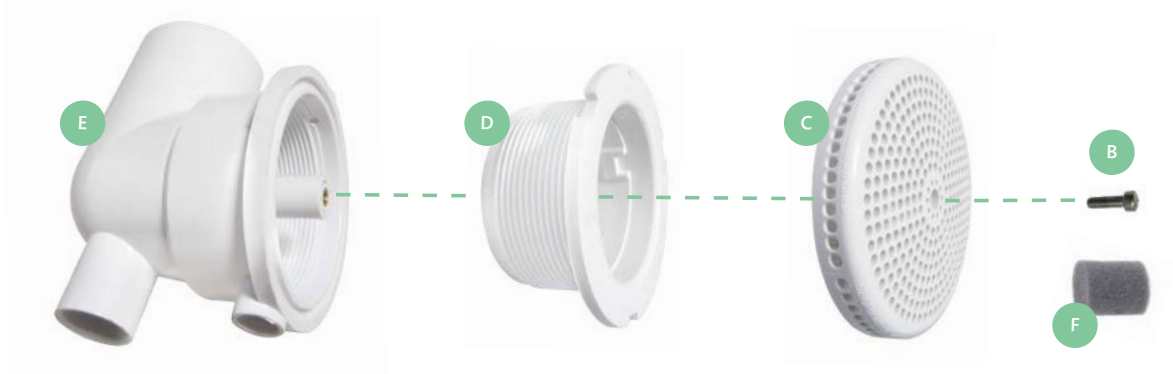

ORDERING GUIDE

REF	CMP P/N	DESCRIPTION
110 GPM LOW PROFILE SAFETY SUCTION		
A	25216-000-000	110 GPM LOW PROFILE SAFETY SUCTION ASSEMBLY
B	61000-506-025	COVER SCREW
C	25216-000-100	SUCTION COVER
—	25216-100-100	OPTIONAL 80 GPM SUCTION COVER
D	25216-000-030	WALL FITTING
D	25216-200-030	CLOSE FIT WALL FITTING FOR CLOSE FIT BODIES
E	25216-000-200	1.5" SLIP BODY
E	25216-200-200	1.5" SLIP CLOSE FIT BODY
E	25216-500-200	CLOSE FIT BODY 50MM SLIP
F	25202-900-000	FOAM FILTER FOR SAFETY SUCTION
—	25216-999-999	TOOL FOR SUCTION WALL FITTING